


BSPET

PET expandable braided sleeving

PET 編織擴充管

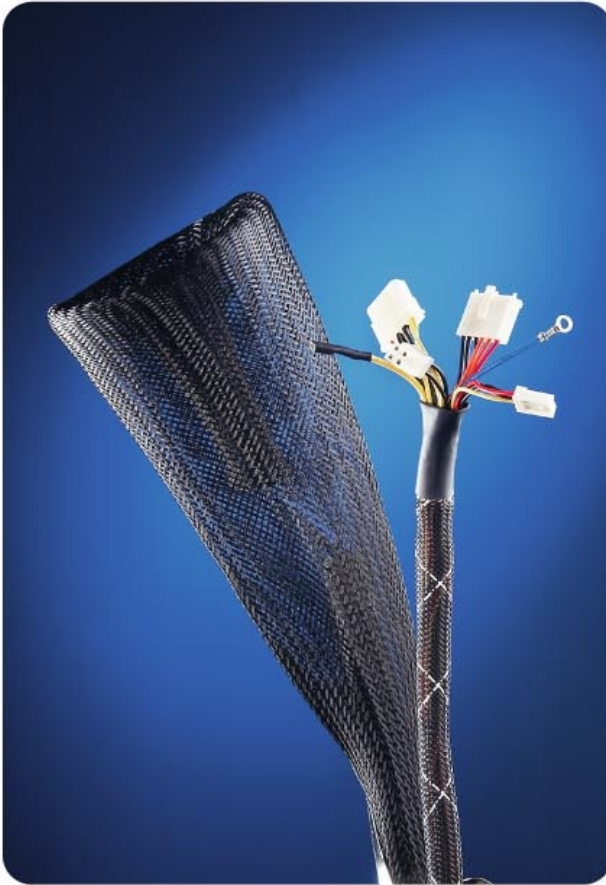

| size | | min. | max. | length/reel | O.D | I.D | ends | carriers |
|--------|------|--------|--------|-------------|-------|-------|------|----------|
| inch | mm | | | m | | | | |
| 1/8" | 3.2 | 3/32" | 1/4" | 305 M/R | 0.175 | 0.125 | 1 | 32 |
| 1/4" | 6.4 | 1/8" | 7/16" | 305 M/R | 0.30 | 0.25 | 1 | 48 |
| 3/8" | 9.5 | 3/16" | 5/8" | 153 M/R | 0.425 | 0.375 | 3 | 36 |
| 1/2" | 12.7 | 1/4" | 3/4" | 153 M/R | 0.55 | 0.5 | 3 | 48 |
| 3/4" | 19.1 | 1/2" | 1-1/4" | 77 M/R | 0.80 | 0.75 | 3 | 72 |
| 1-1/4" | 29.0 | 3/4" | 1-3/4" | 77 M/R | 1.30 | 1.25 | 3 | 96 |
| 1-1/2" | 40.0 | 1" | 2-1/2" | 61 M/R | 1.55 | 1.50 | 3 | 120 |
| 1-3/4" | 45.0 | 1-1/4" | 2-3/4" | 61 M/R | 1.80 | 1.75 | 4 | 120 |
| 2" | 50.0 | 1-1/2" | 3-1/2" | 61 M/R | 2.05 | 2.0 | 5 | 120 |

BSPET PET expandable braided sleeving

Applications

Designed from durable environment friendly PET monofilament yarns and the unique braided construction enables quick and easy installation over large connectors. These sleeveings are used in wire harnessing in industries, hose and cable protection for the automotive, heavy equipment and marine industries. Also used for general commercial applications such as personal computers, automotive, motorcycling, bicycling, flyfishing and scuba diving.

Characteristics

UV light resistant polyester yarn
Not affected by most chemicals and solvents
Light weight and flexible and high tensile strength (1 to 3 ratio)
Excellent abrasion and cut-through resistance and moisture resistant.

Operating temperature range

Operating temperature: -40°C ~ 150°C

