


G5(FCB)

Ultra thin wall, environmentally friendly polyolefin tubing
環保超薄型熱收縮套管

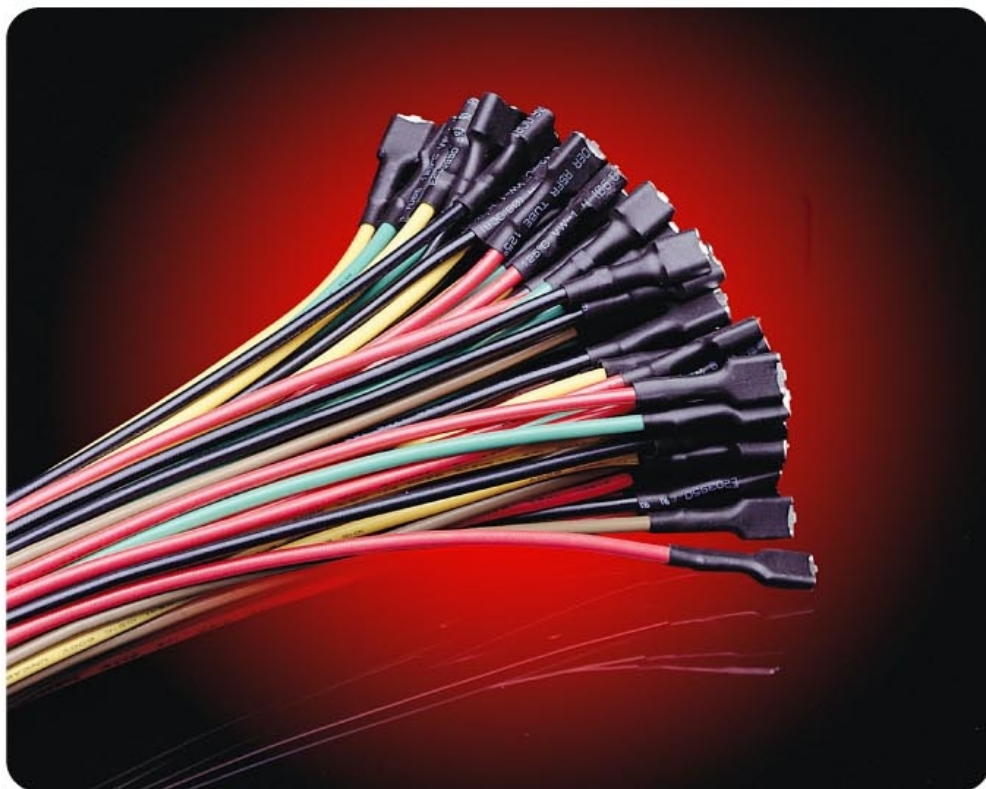

G5(FCB)

Ultra thin wall, environmentally friendly polyolefin tubing

Applications

Ultra thin wall and low recovery temperature provide space savings and rapid shrinking. Used for strain relief on high-density connectors and further reduces risk of damage to temperature-sensitive components.

Characteristics

Very flexible, highly flame-retardant (colors only)
Low shrink temperature and rapid shrinking
Excellent physical, chemical, and electrical properties

Operating temperature range

Operating temperature: -55°C ~ 125°C
Minimum shrink temperature: 60°C
Minimum full recovery temperature: 100°C

Approvals / Specifications

c  us UL224 File no. E255532, 125°C VW-1 300V

size	as supplied (mm)		as recovery (mm)		package
(mm)	I.D.	W.T.	I.D. (max)	W.D. (min)	(m/spool)
ø0.8	1.0±0.2	0.10±0.03	0.5	0.20	200
ø1.0	1.4±0.2	0.10±0.03	0.6	0.20	200
ø1.5	1.9±0.2	0.10±0.03	0.75	0.20	200
ø2.0	2.4±0.2	0.12±0.03	1.0	0.20	200
ø2.5	2.8±0.3	0.13±0.05	1.25	0.25	200
ø3.0	3.4±0.3	0.13±0.05	1.5	0.25	200
ø3.5	3.9±0.3	0.13±0.05	1.75	0.25	200
ø4.0	4.4±0.3	0.15±0.05	2.0	0.25	200
ø5.0	5.5±0.3	0.15±0.05	2.5	0.25	100
ø6.0	6.5±0.3	0.15±0.05	3.0	0.28	100
ø7.0	7.5±0.3	0.15±0.05	3.5	0.28	200
ø8.0	8.6±0.4	0.15±0.05	4.0	0.28	200
ø9.0	9.6±0.4	0.15±0.05	4.5	0.28	200
ø10.0	10.6±0.4	0.15±0.05	5.0	0.28	200
ø11.0	11.6±0.4	0.18±0.05	5.5	0.28	200
ø12.0	12.6±0.4	0.20±0.05	6.0	0.28	200
ø13.0	13.6±0.4	0.20±0.05	6.5	0.30	200
ø14.0	14.6±0.4	0.20±0.05	7.0	0.30	200
ø15.0	15.6±0.5	0.20±0.05	7.5	0.32	200
ø16.0	16.6±0.5	0.20±0.05	8.0	0.36	200
ø18.0	18.6±0.5	0.22±0.05	9.0	0.36	200
ø20.0	21.0±1.0	0.25±0.05	10.0	0.36	100
ø22.0	23.0±1.0	0.25±0.05	11.0	0.40	100
ø25.0	26.0±1.0	0.25±0.05	12.5	0.40	100

Color: black, white, red, blue, yellow, green, other colors on request.

Special size, cut pieces are available on request.

